

## ◆ Features

Wide temperature range -55~+105°C

Load life of 2000~3000 hours

RoHS & REACH compliant, Halogen-free



## ◆ Specifications

Temperature: -55 ~ +105°C

Load life: 2000 ~ 3000 hrs.

Voltage: 6.3 ~ 50V DC


Capacitance: 0.1 ~ 1500 $\mu$ F

Tolerance:  $\pm$ 20% at 120Hz, 20°C


Size: 4x5.8, 5x5.8, 6.3x5.8, 6.3x7.7, 8x10.5, 10x10.5, 10x13.5,  
12.5x13.5, 12.5x16, 16x16.5

## ◆ Drawing of HEL Series

( $\varnothing$ 4~ $\varnothing$ 6.3x7.7) Unit: mm

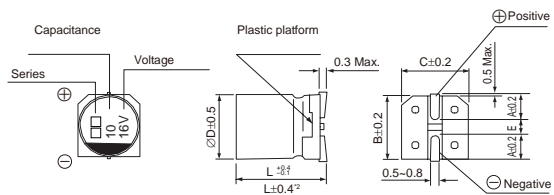

( $\varnothing$ 8x10.5~ $\varnothing$ 16) Unit: mm

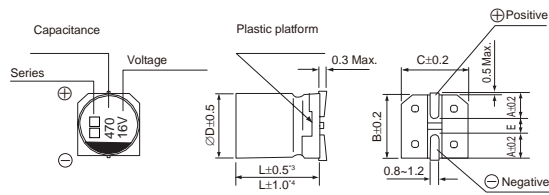

1. Voltage mark for 6.3V is [6V]
2. Applicable to  $\varnothing$ 6.3x7.7
3. Applicable to  $\varnothing$ 8x10.5~ $\varnothing$ 10
4. Applicable to  $\varnothing$ 12.5~ $\varnothing$ 16