

## ◆ Features

Operating with wide temperature range  $-55\sim+105^{\circ}\text{C}$

Low ESR, high ripple current

Load life of 2000 hours

RoHS & REACH compliant, Halogen-free



## ◆ Specifications

Temperature:  $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Load life: 2000hours

Voltage: 2.5 ~ 25V DC


Capacitance: 3.3 ~ 1500 $\mu\text{F}$

Tolerance:  $\pm 20\%$  at 120Hz,  $20^{\circ}\text{C}$

Size: 4x5.5, 5x6, 6.3x5.5/6, 8x7, 8x12, 10x8/10, 10x12.7

## ◆ Drawing of HMA Series

Unit: mm

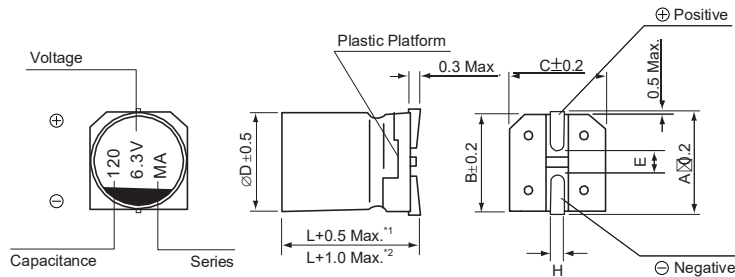

\*1. Applicable to  $\varnothing 5 \sim \varnothing 8$

\*2. Applicable to  $\varnothing 10$  and above