

◆ Features

Extra lower impedance with temperature range -55~+105 °C

Load life of 2000~5000 hours

Impedance 5~25% less than HKZ series

RoHS & REACH compliant, Halogen-free



◆ Specifications

Temperature: -55°C ~ +105°C

Load life: 2000 ~ 5000 hrs.

Voltage: 6.3~ 100V DC


Capacitance: 3.3~ 8200uF

Tolerance: ±20% at 120Hz, 20°C


Size: 4x5.8, 5x5.8, 6.3x5.8, 6.3x7.7, 8x10.5, 10x10.5, 10x13.5,
12.5x13.5, 12.5x16, 16x16.5, 18x16.5, 18x18.5

◆ Drawing of HFZ Series

($\varnothing 4$ ~ $\varnothing 6.3 \times 7.7$) Unit: mm

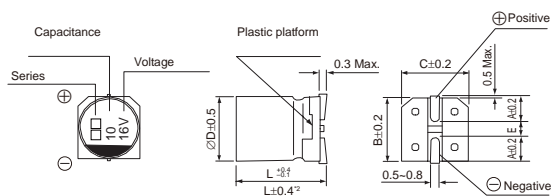

($\varnothing 8 \times 10.5$ ~ $\varnothing 18$) Unit: mm

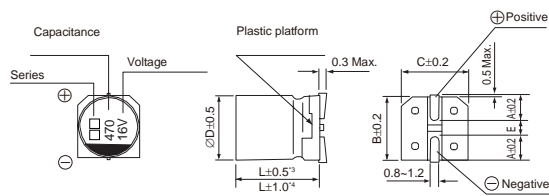

1. Voltage mark for 6.3V is [6V]
2. Applicable to $\varnothing 6.3 \times 7.7$
3. Applicable to $\varnothing 8 \times 10.5$ ~ $\varnothing 10$
4. Applicable to $\varnothing 12.5$ ~ $\varnothing 18$