

◆ Features

Operating with wide temperature range $-55\sim+105^{\circ}\text{C}$

Low ESR, high ripple current

Load life of 2000 hours

RoHS & REACH compliant, Halogen-free



◆ Specifications

Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Load life: 2000hours

Voltage: 2.5 ~ 25V DC


Capacitance: 3.3 ~ 1500 μF

Tolerance: $\pm 20\%$ at 120Hz, 20°C

Size: 4x5.5, 5x6, 6.3x5.5/6, 8x7, 8x12, 10x8/10, 10x12.7

◆ Drawing of HMA Series

Unit: mm

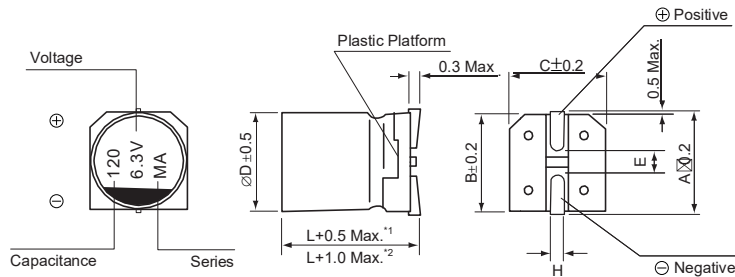

*1. Applicable to $\varnothing 5\sim\varnothing 8$

*2. Applicable to $\varnothing 10$ and above